
Alimak FC 6800-12 HS

Model 650 FC-S 31/39 Hi-Speed Single Car Construction Hoist

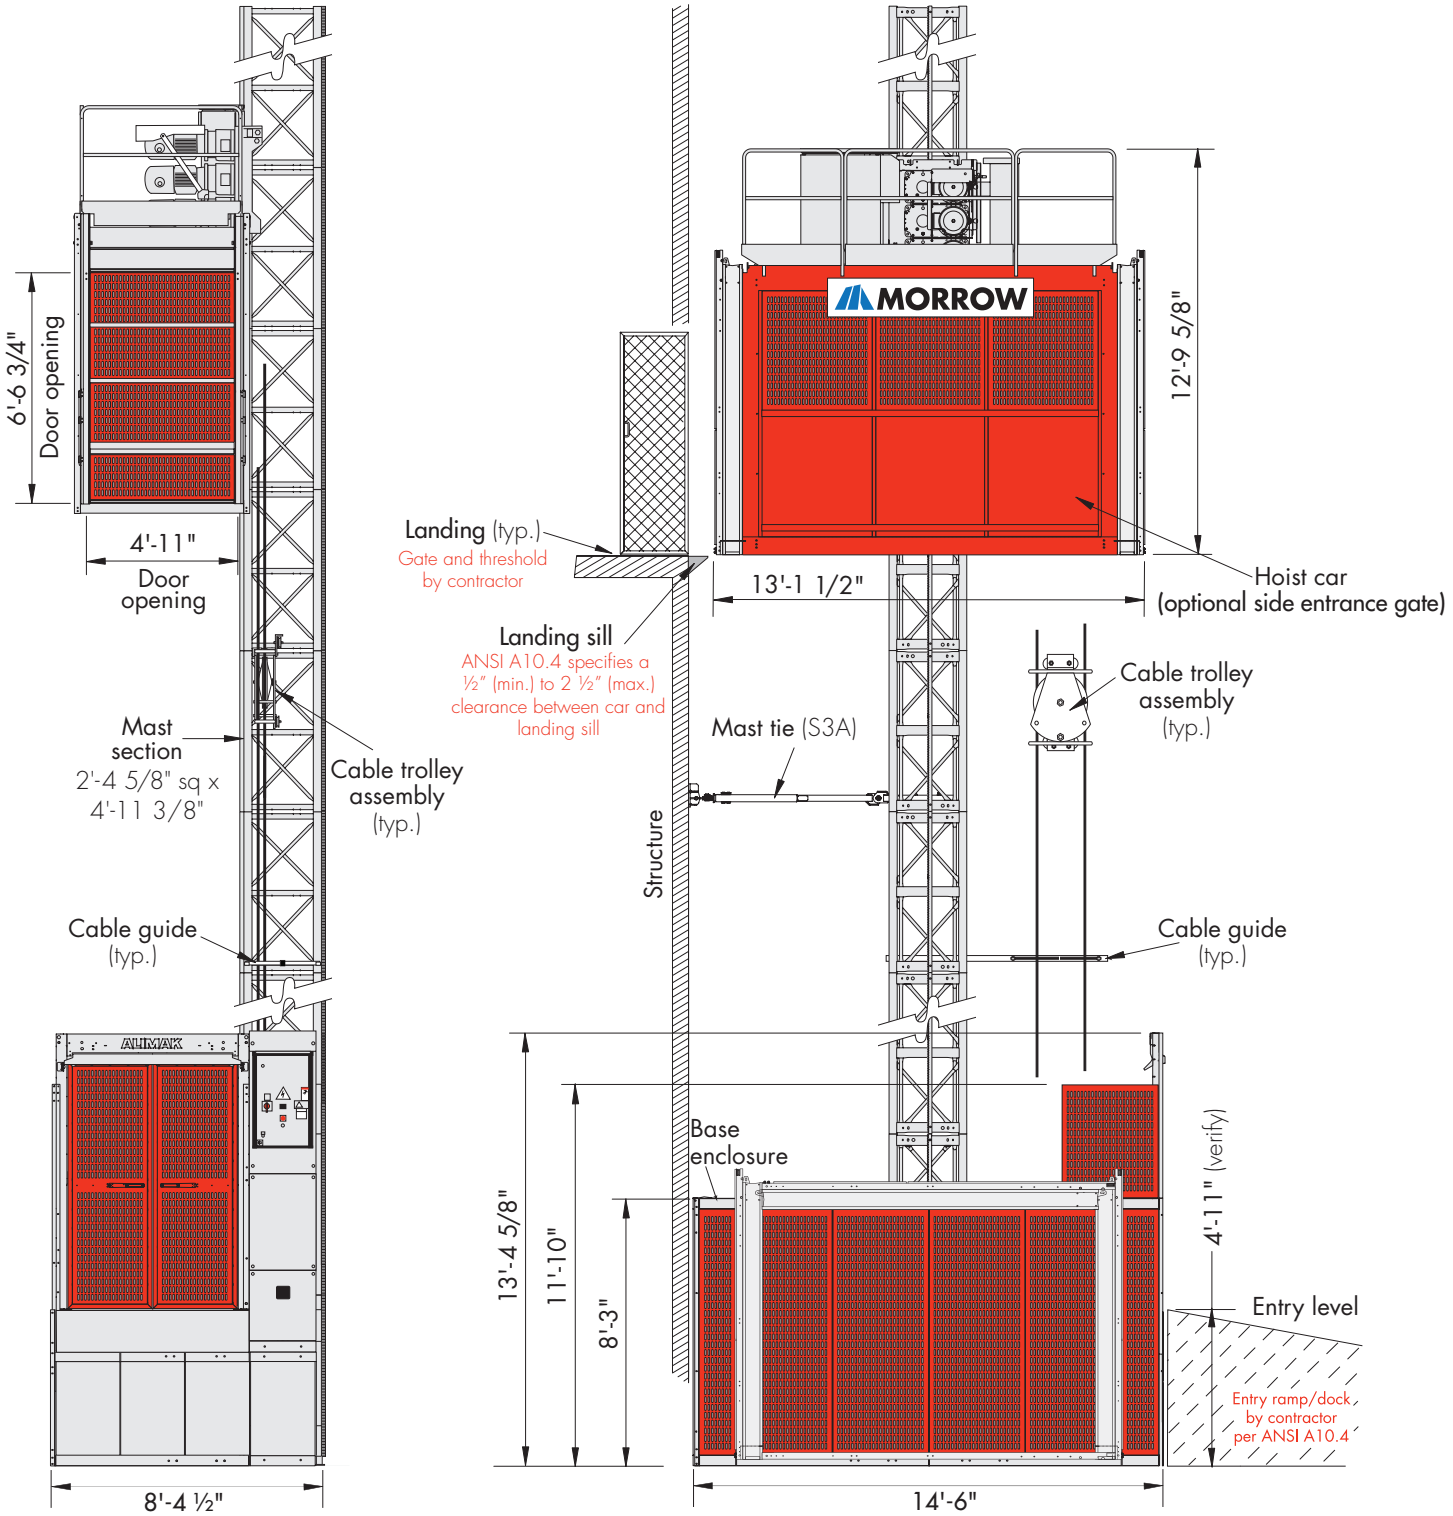

SPECIFICATIONS

Meets the Requirements of ANSI A10.4

GENERAL

Max. load capacity[1] ..... 6,835 lbs
Max. freestanding mast height[2] ..... 30'-0"
Max. untied mast overhang[3] ..... 30'-0"
Max. mast tie spacing[3] ..... 30'-0"
Minimum mast tie spacing[3] ..... 24'-7"
Max. standard lifting height[4] ..... 660'
Number of passengers 30
Car inside dimensions (approx.) ..... 12'-9" x 4'-11" x 7'-6½"
Side gate opening (if equipped) ..... 6'-6 3/4" x 10'-6"
Mast section length ..... 4'-11 3/8"
Speed ..... Up to 328 fpm

[1] Maximum capacity of 6,835 lbs to a lifting height of 660'. Contact Morrow Equipment for specific capacities at greater lifting heights.
[2] Requires use of an embedded foundation frame in lieu of mast anchor expansion bolts. See operation manual or contact Morrow engineering for specific information. Foundation anchorage provided by customer.
[3] Maximum untied mast overhang and mast tie spacing dimensions vary subject to installation conditions, manufacturer specifications, and regulatory compliance. See manufacturer data or contact Morrow Equipment for specific information.
[4] Greater lifting heights are available. Contact Morrow Equipment for specific information.

WEIGHTS

Base enclosure (without car) ..... 2,340 lbs
Base enclosure (with car) ..... 8,600 lbs
Motorpack (3 x 30 hp) ..... 2,650 lbs
Hoist car (without motorpack) ..... 3,610 lbs
Mast section (single rack) ..... 254 lbs

ELECTRIC POWER

480 V phase–phase, 277 V each phase to ground with 120° phase shift between phases. 3-phase, 60 Hz power supply plus ground wire. Do not use Open-Delta supply.

Motors (VFD) ..... 3 x 30 hp (22 kW)
Power supply fuses ..... 200 Amps
Starting current ..... 185 Amps
Power consumption ..... 115 kVA

@MorrowEquipment:
(503) 585-5721
info@morrow.com
morrow.com